


300/300 V 90°C 60227 IEC 56 (HVKF)

2 CORES - HEAT-RESISTANT LIGHT PVC-SHEATHED CORD

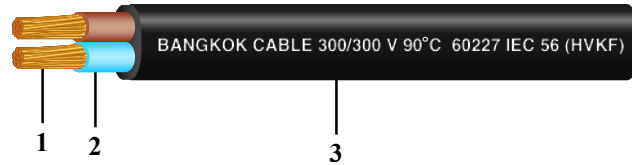

Construction

- 1. Conductor : Bunch stranded annealed copper
- 2. Insulation : Polyvinyl chloride (PVC)
Colour code : Blue, Brown
- 3. Sheath : Polyvinyl chloride (PVC), Black colour

Standard :

TIS 11 Part 5-2553



Classification

- Maximum conductor temperature : 90°C
- Rated voltage : 300/300 V
- AC test voltage : 2,000 V

Application

- Use for connecting portable electric appliances (heavy duty)

Products code	No. of core	Conductor			Thickness of insulation	Thickness of sheath	Overall diameter		Insulation resistance at 90°C	Current rating in free air	Cable weight	Standard length
		Cross-sectional area	Dia. of wires	Diameter			Lower limit	Upper limit				
C2LT02094012	2	0.5	0.21	0.92	0.5	0.6	3.0 x 4.9	3.7 x 5.9	0.012	3	29	100/C
C2LT02164012	2	0.75	0.21	1.13	0.5	0.6	3.2 x 5.2	3.8 x 6.3	0.010	6	36	100/C

C = Packing in coil